

Titan™ Fall Limiter (TFL)

Description

Designed for applications requiring up to 11 ft. working length, the Titan Fall Limiters are small enough to fit in the palm of your hand.

Materials

Housing:	Thermoplastic Cover
Snaphook:	Drop Forged Steel
Lifeline:	1 in. x 06 in. Polyester
Thread:	Polyester
Carabiner:	Zinc plated steel (if applicable)
Jaw & Jaw Swivel:	Stainless Steel (if applicable)

Technical

Max Weight Capacity:	310 lbs. (140.62 kg)
Max. Working Length:	11 ft. (3.35 m)
Max. Total Arrest Distance:	54 in. (1.4 m)
Max. Fall Arrest Force:	900 lbf. (4 kN) (when tested to OSHA 1926.502 & CSAZ259.2.2)


Max./Avg. Fall Arrest Force:	1,800 lbf. (8 kN) / 900 lbf. (4 kN) (when tested to ANSI Z359.14)
Ultimate Strength:	3,000 lbf. (13.34 kN)

Certification:

Meets all OSHA 1926.502, 1910.66, ANSI A10.32, and CSA Z259.2.2-98 (Type 1) requirements.

Connecting components meet or exceed ANSI Z359.12-2009 or CSA Z259.12-11 requirements for 3,600 lb. gate strength. For questions about products purchased prior to January 1, 2015, please contact Honeywell Technical Service at 800.873.5242.

All units are equipped with a Fall Indicator. In the event of a fall, a flag deploys to indicate the unit has been subjected to fall arresting forces and should be removed from service.

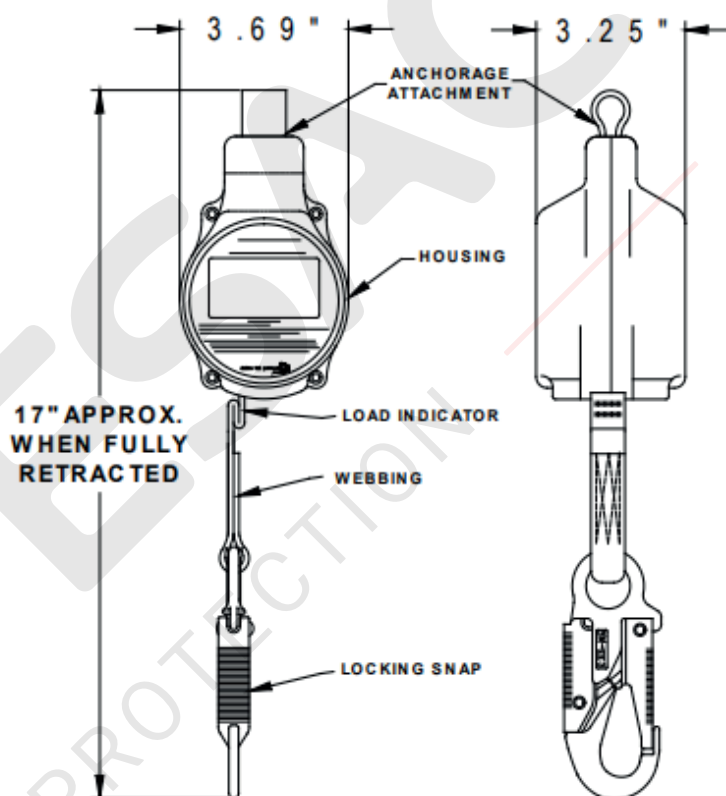

Model	Unit Connector	Weight
TFL-Z7/11FT	No unit connector	2.5 lbs. (1.1 kg)
TFL-1-Z7/11FT	Steel Twist-Lock Carabiner	2.8 lbs. (1.3 kg)
TFL-2-Z7/11FT	Stainless Steel Swivel Shackle	2.6 lbs. (1.2 kg)
TFL-3-Z7/11FT	Stainless Steel Swivel Shackle & Steel Twist-Lock Carabiner	2.9 lbs. (1.3 kg)
TFL-6-Z7/11FT	Stainless Steel Swivel Shackle & Steel Locking Rebar Hook	3.2 lbs. (1.5 kg)

GRUPESAC
FULL PROTECTION

GRUPESAC
FULL PROTECTION